


Lubrication Points

For the details of lubrication points and types of lubricants to be applied, refer to the Illustrated Index and various work procedures (such as Assembly/Reassembly, Replacement, Overhaul, Installation, etc.) contained in each section.


| No. | LUBRICATION POINTS | LUBRICANT |
|-----|---|--|
| 1 | Engine | API Service Grade: Use SG or SH "Energy Conserving II" grade oil. The oil container may also display the API Certification mark shown below. Make sure it says "For Gasoline Engines." SAE Viscosity: See chart below. |
| 2 | Transmission Manual Automatic | API Service Grade: SF or SG SAE Viscosity 10 W-30 or 10 W-40 Honda Premium Formula Automatic Transmission Fluid or an equivalent DEXRON® II type automatic transmission fluid |
| 3 | Brake Line (including anti-lock brake system) | Brake fluid DOT3 or DOT4 |
| 4 | Clutch Line | Brake fluid DOT3 or DOT4 |
| 5 | Shift lever pivots (M/T) | Silicone grease with molybdenum disulfide |
| 6 | Release fork (M/T) | High Temp Urea Grease (P/N 08798-9002) |
| 7 | Steering gearbox | Multi-purpose grease |
| 8 | Steering boots | |
| 9 | Steering column bushings | |
| 10 | Steering ball joints | |
| 11 | Shift lever (A/T) | |
| 12 | Pedal linkage | |
| 13 | Intermediate shaft | |
| 14 | Brake master power pushrod | |
| 15 | Trunk hinges | |
| 16 | Door hinges upper and lower | |
| 17 | Door opening detents | |
| 18 | Fuel filler lid | |
| 19 | Hood hinges and latch | |
| 20 | Clutch master cylinder pushrod | |
| 21 | Tilt lever | |
| 22 | Parking brake cable end | Silicone grease |
| 23 | Throttle cable end | |
| 24 | Rear hatch latch | Compressor oil: NIPPONDENSO: ND-OIL8 (P/N 38899-PR7-A01) (For Refrigerant: HFC-134a (R-134a)) |
| 25 | Retractable headlight pin contact area | |
| 26 | Shift cable end and select cable end | Compressor oil: NIPPONDENSO: ND-OIL8 (P/N 38899-PR7-A01) (For Refrigerant: HFC-134a (R-134a)) |
| 27 | Caliper Piston seal, Dust seal, Caliper pin, Piston | |
| 28 | Air conditioning compressor | Compressor oil: NIPPONDENSO: ND-OIL8 (P/N 38899-PR7-A01) (For Refrigerant: HFC-134a (R-134a)) |



API SERVICE LABEL



API CERTIFICATION MARK

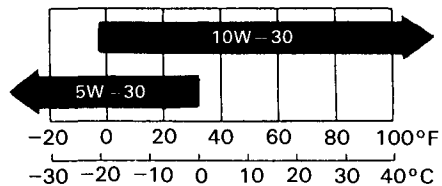

Recommended engine oil
Engine oil viscosity for
ambient temperature ranges

** : SG or SH

