




## Switch Test

1. Remove the dashboard lower cover.
2. If necessary, remove the knee bolster.
3. Disconnect the 18-P connector from the floor wire harness.
4. Check for continuity between the terminals in each switch position according to the table.

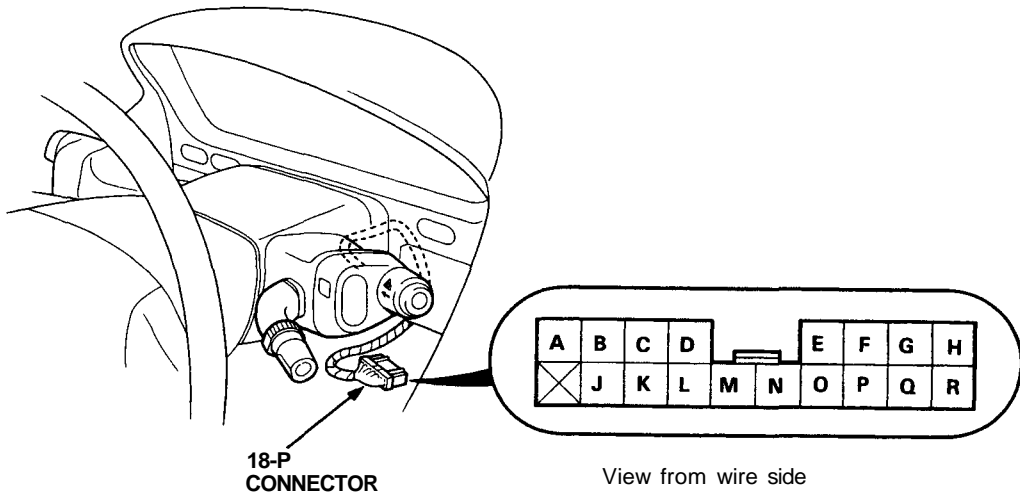

Terminal	B	K	H		G	J		L
Position								
PUSHED	○	○						
RELEASED			○	○	○	○	○	○

